

- NOTES**
1. DOOR FRAME TO BE STEEL OF MIN 5mm THICKNESS TO ACCEPT M8 FIXING BOLTS, AND TAKE WEIGHT OF DOOR (approx 20kg/m²).
 2. ALL INSIDE SURFACES OF THE FRAME TO BE MIN 150mm WIDE, HEADER AND JAMB TO BE FLUSH AND FREE FROM ANY PROJECTIONS.
 3. TOP TRACK IS ONLY USED AS GUIDE. THE DOOR IS SIDE-HUNG AND THE WEIGHT IS SUPPORTED AT THE JAMB HINGES.
 4. THE FLOOR MUST BE LOWER THAN THE THRESHOLD IN THE FOLDING AREA MARKED ***** TO ALLOW LEAVES TO OPEN EASILY.

NUMBER OF DOORS

FINISH (specify material and colour)

EXTERNAL SKIN:

INTERNAL SKIN:

OPTIONS (please tick or indicate qty reqd)

VISION PANELS - SEE GLAZING LAYOUT DRAWING

680X390 PLASTIC EASIFT

400X600 ALUMINIUM FRAME

400X1200 ALUMINIUM FRAME

600X600 ALUMINIUM FRAME

600X1200 ALUMINIUM FRAME

600X1200 ALUMINIUM FRAME

WICKET DOOR (in panel 2 or 3 only)

STANDARD LEVER HARDWARE

EMERGENCY ESCAPE FURNITURE

LOCKING and HANDLES

ESPAGNOLETTE BOLT BETWEEN LEAVES 182 AND 3&4

THRESHOLD PLATE





NONE - (NOT RECOMMENDED)

SURROUND FRAME

150 x 75 RSA REAR MOUNTED FRAME

200 x 100 RHS BETWEEN WALL FRAME

OTHER - PLEASE SPECIFY

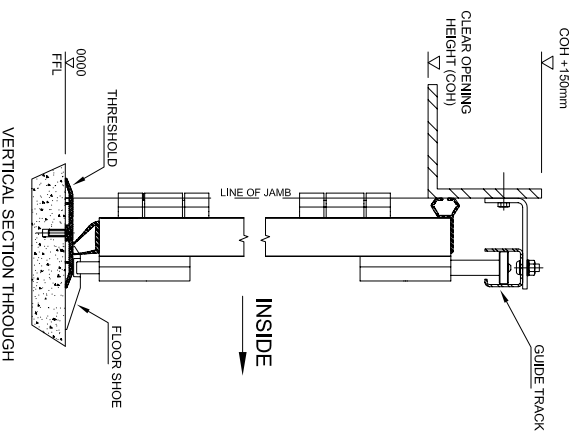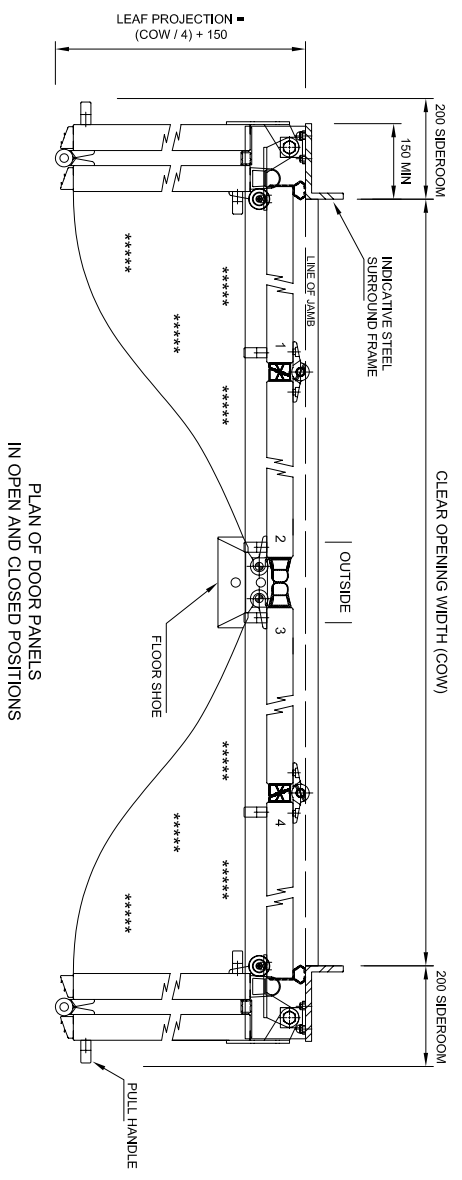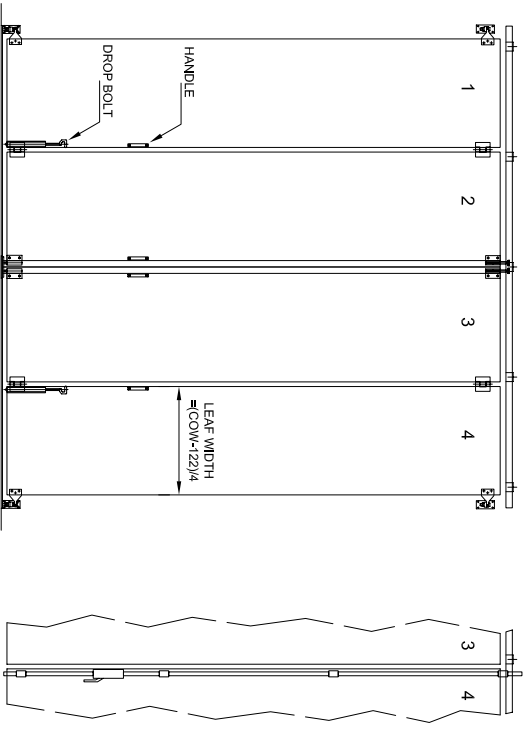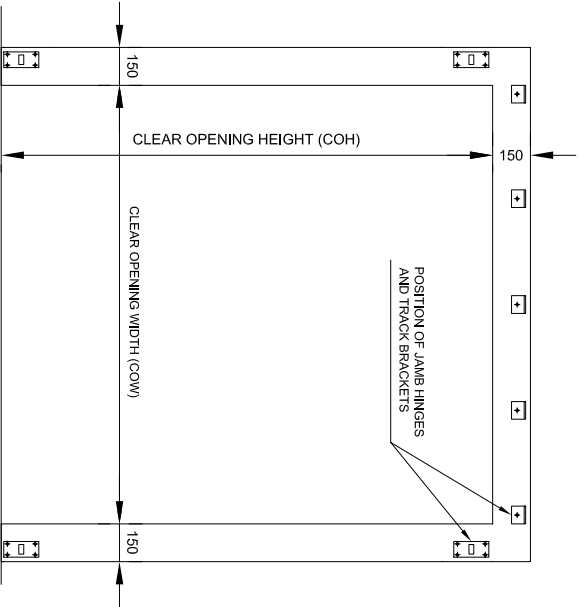

| | |
|---|--|
| MAX OPENING SIZES | |
| UP TO 4800mm WIDE | |
| UP TO 6000mm HIGH | |
| SUBJECT TO MAX. DOOR AREA OF 24M ² | |

DATE _____ DRAWN BY _____

DRAWING No. SWT22M-5003

SWIFT 2+2 LEAF MANUALLY OPERATED