


180mm MIN


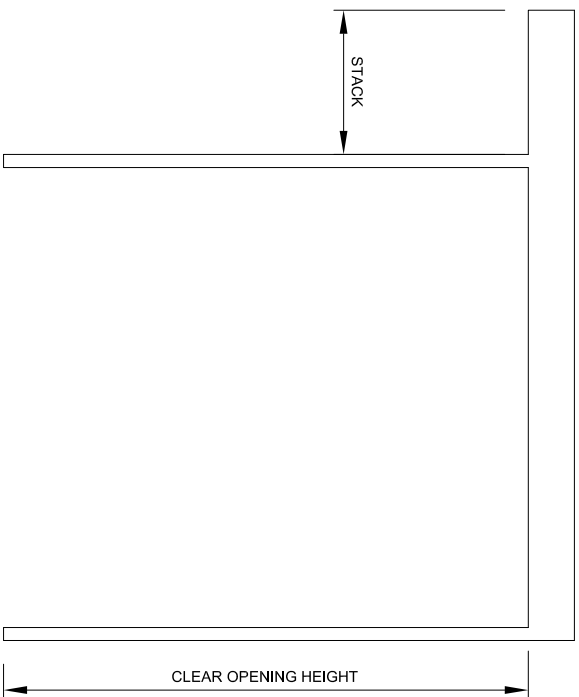


50mm MIN

DETAIL SHOWING MINIMUM JAMB & HEAD SURFACE DIMENSIONS


CLEAR OPENING WIDTH

85mm MIN

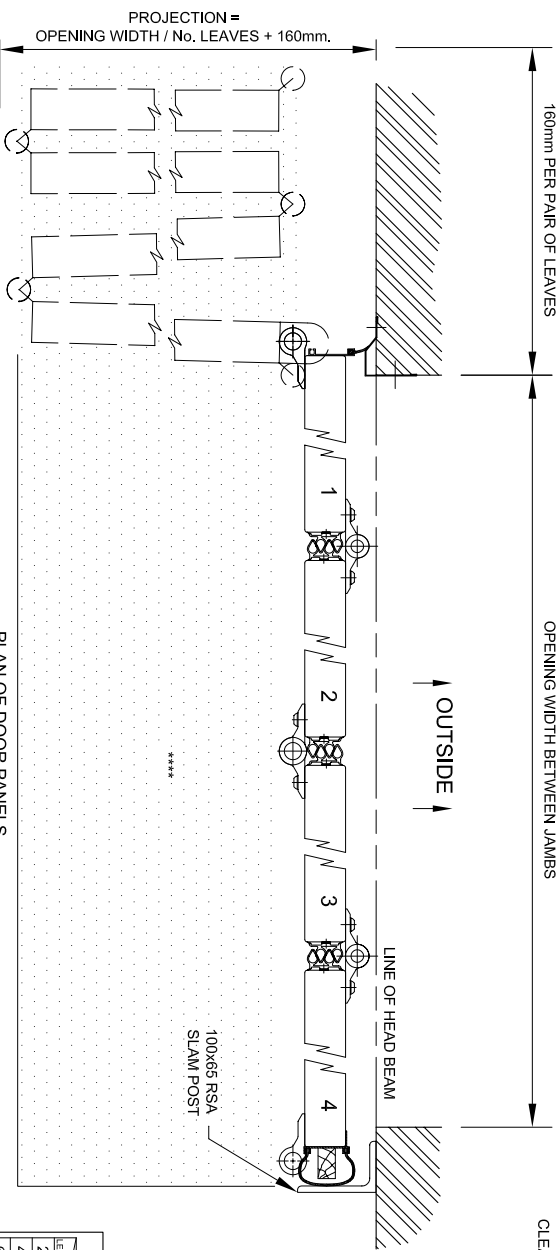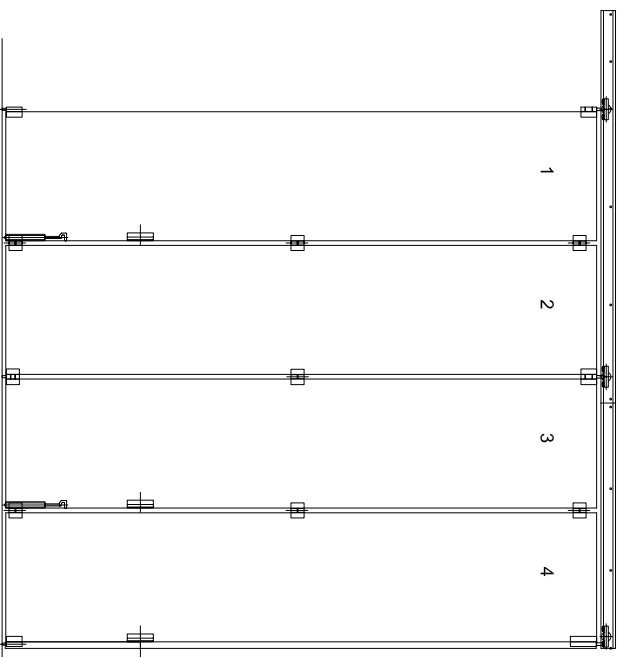

OPENING WIDTH BETWEEN JAMBS

CLEAR OPENING HEIGHT

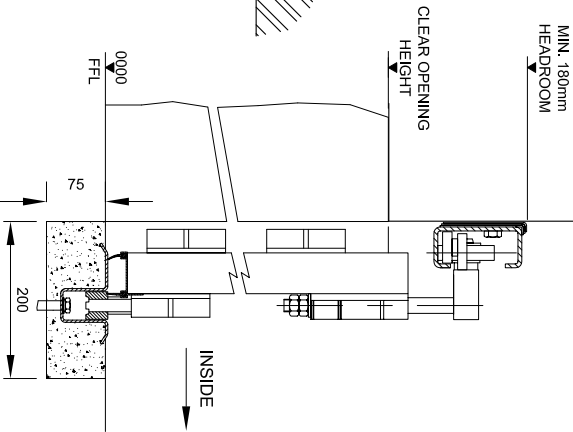

PLAN OF DOOR PANELS  
IN OPEN AND CLOSED POSITIONS

LEAF COUNTS	MAX. HEIGHT	UPTO 5200mm HIGH	UPTO 8000mm HIGH
2 LEAVES	2150mm WIDE	1950mm WIDE	4000mm WIDE
4 LEAVES	4450mm WIDE	6050mm WIDE	8100mm WIDE
6 LEAVES	6350mm WIDE	8100mm WIDE	
8 LEAVES	9000mm WIDE		

MAX DOOR SIZES

**Jewellers**  
Specialist Doors

NOTES  
INSIDE FACE OF HEAD BEAM AND SEALING FACE BETWEEN JAMBS TO BE FREE FROM FIXINGS / FITTINGS ETC.  
HEAD BEAM MUST BE SUITABLE TO ACCEPT M10 FIXING BOLTS AND DESIGNED TO TAKE DOOR WEIGHT OF APPROX 20kg/m<sup>2</sup>. MAXIMUM ALLOWABLE DEFLECTION UNDER WEIGHT OF DOOR = 8mm.  
FLOOR MUST BE LOWER THAN THRESHOLD IN SHADED LEAF SWEEPING AREAS MARKED \*\*\*\*\*.

OPTIONS (please tick if reqd)  
WINDOWS (MAX 2 PER LEAF)

- 680x370 EASIFIT D/G ACRYLIC VISION PANEL
- 680x500 D/G SECURITY VISION PANEL

WICKET DOOR

- WICKET DOOR STD LEVER HARDWARE
- WICKET DOOR PANIC HARDWARE (TO BE FITTED IN END LEAF ONLY)

LOCKING - FOR EACH PAIR OF LEAVES

- ESPAGNOLETTE BOLT

QUANTITY SETS AS DRAWN  
SETS OPPOSITE HAND

FINISH EXTERNAL:

INTERNAL:

CONTRACTOR/CIENT

SITE

OPENING / DOOR REF.

DATE DRAWN BY  
DRAWING No. OSP-F1CM-5108

OSPREY DOOR - FULLY FLOATING MANUAL SINGLE BUNCH BEYOND THE JAMB

